



Welcome to a world of clean air.

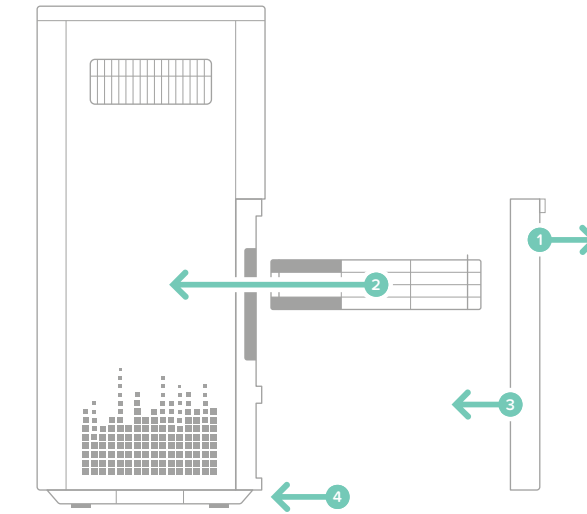


Installation

- 1 Open case backing
- 2 Insert collection plates top up
- 3 Close case back
- 4 Plug into power outlet using provided cable

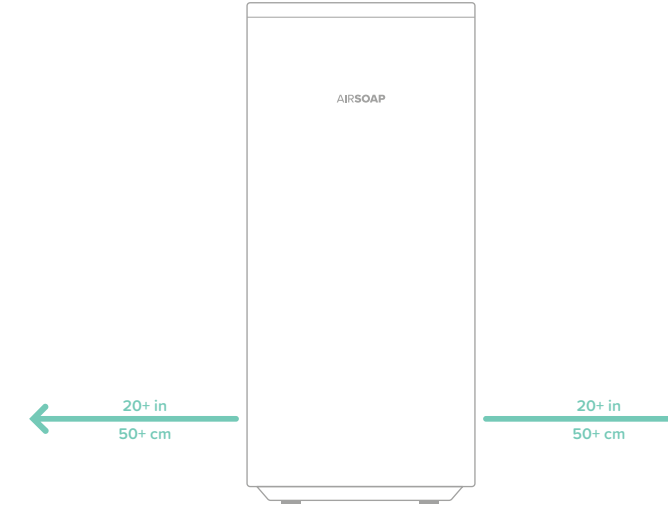

Optimal Location

For optimal performance, place AirSoap in an open location with at least 20 inches in space surrounding all sides.

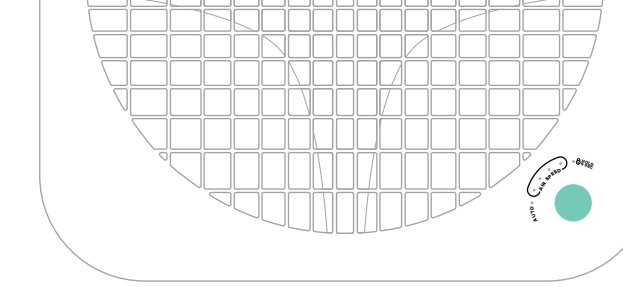


Operation

- Turn on AUTO mode
- Switch to manual mode with fan speed 1
- Increase manual mode to fan speed 2
- Increase manual mode to fan speed 3
- Increase manual mode to fan speed 4
- Turn AirSoap off
- Hold for 5 seconds to activate child lock. Light will turn red.
- When cleaning is required, AUTO light will blink red. Hold for 10 seconds to reset cleaning timer.



Air Quality Indicator


- Excellent**
0-35 ug/m³
Air quality is considered satisfactory, and air pollution poses little or no risk.
- Moderate**
35-75 ug/m³
Air quality is acceptable; however, for some pollutants there may be a moderate health concern.
- Unhealthy**
75-150 ug/m³
People with heart and lung disease, older adults and children are at a greater risk from exposure to increased presence of particles in the air.
- Hazardous**
150+ ug/m³
Everyone may begin to experience some adverse health effects, and members of the sensitive groups may experience more serious effects.

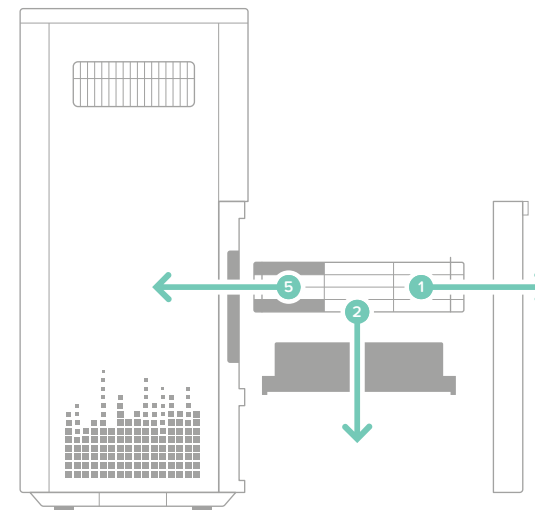

Collection Plate Cleaning

Clean when **AUTO** light blinks red


- 1 Remove collection plates
- 2 Unlock and separate collection plates
- 3 Wash with water or place in dishwasher (Top rack only)
- 4 Dry collection plates
- 5 Reassemble and insert

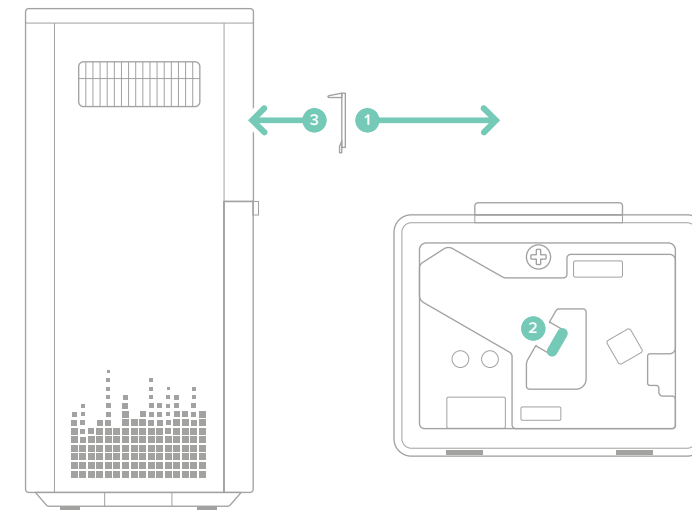

Air Quality Sensor Cleaning

Clean as needed


- 1 Remove air quality sensor housing
- 2 Use a dry or rubbing alcohol-soaked cotton swab to clean the sensor
- 3 Replace air quality sensor housing

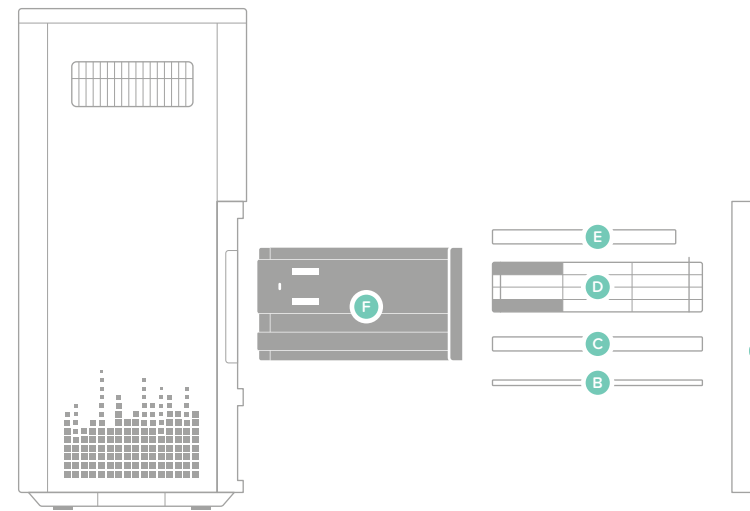

Full Cleaning Cycle

Recommended cleaning every 8-12 months

- 1 Open back (A) and Remove pre-filter (B), ionization wire frame (C), collection plates (D), and odor neutralizer (E)
- 2 Remove protective rubber sleeve (F)
- 3 Wash pre-filter, ionization wire frame, collection plates, and protective rubber sleeve with water; allowing to dry completely
- 4 Clean inner walls of AirSoap with wet cloth
- 5 Recharge odor neutralizer in HomeSoap (Sold separately) or put in sun for 1-2 hours
- 6 Reinsert components into AirSoap frame

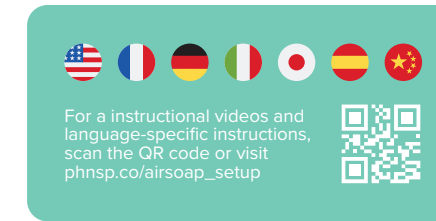

Warranty

We stand behind the quality of our product. We offer a 1-year limited warranty on every PhoneSoap product. Exclusions and limitations may apply.

To view the full warranty and return policy visit: phonesoap.com/warranty

By using this product, you agree to the Legal and Privacy Policies as stated on our website at: phonesoap.com/legal

Please contact us with any questions or concerns. www.phonesoap.com/contact



- Turn off power before cleaning and maintenance
- Use with original power adapter
- Avoid impacts or dropping the unit
- Keep away from children
- Do not block air inlet and air outlet
- Do not use around flammable or explosive environment with combustible gas or dust
- Do not use in wet environments
- Do not use near a heat source or in a high temperature environment

WARNING

This product contains a chemical known to the state of California to cause cancer. www.P65Warnings.ca.gov

AIRSOAP